

Generator Controller Options



- Dashboard Style LCD Panel
- NFPA 110
- SAE J1939 ECU Communications
- Load Share Synch Features
- Metering, Data Trending, Alarms
- Engine Status Indicators
- Fuel Consumption
- CanBus, ModBus
- Ethernet Communications
- Remote Contacts Form C, RS 232/485

- Internet Bridge Module
- Internet Connection & Web Browser
- Remote Access & Control
- IntelliMonitor Network Management
- SNMP, PC SCADA
- Site Overview & Statistic Settling
- Automatic Downloads, Report Writer
- Receive Emails or IM Text
- CAT 5e, RS232/485, RJ 45
- Ethernet or Dial Up Connection
- Fleet Scalability

Alternator Specifications

Manufacturer	Marathon	<ul style="list-style-type: none"> • NEMA MG1, IEEE, AND ANSI standards compliance for temperature and motor starting. • Sustained short-circuit current of the rated current for up to 10 seconds. • Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field. • Self-ventilated and dripproof construction. • Superior voltage waveform from a two-thirds pitch stator and skewed rotor. • Linkboards • Optimized Electrical Design • Enhanced Ventilation • Fully Guarded • Heavy Duty Bearings
Type	Ext. Voltage Regulated, Brushless	
Gen Frame	360 MAGNAMAX	
Insulation	NEMA	
Material	Class H	
Temperature Rise	130 °C, Standby	
Hertz	60	
Phase	3	
RPM	1800	
Exciter	Rotating	
# Leads	12 Reconnectable or 4 Single Phase	
PF	0.8	
Ambient	40°C	
Coupling Single Bearing	Flexible	
Amortisseur Windings	Full	
Cooling Air Volume	250 CFM	
Peak Motor Starting	35% Voltage Dip, 5500 skVA	
Voltage Regulation no-load and full-load	3 Phase Sensing 1/2%	

STANDARD FEATURES

- Heavy Duty Steel Base
- Vibration Isolators
- Oil Drain Valve with Extension
- Battery Rack
- Battery Cables
- High Ambient Unit Mounted Radiator
- Battery Charging Alternator
- Factory Paint
- Factory Test Prior to Shipment
- 2 Year Warranty
- Owners Manual

AVAILABLE ACCESSORIES

OPEN UNIT

- Narrow Skid Base
- Radiator Duct Flange
- Ship Loose Flex Exhaust
- Ship Loose Critical Silencer

ENCLOSED UNIT

- Wide Skid Base
- Standard Enclosure With Internal Silencer
- Sound Attenuated Enclosure With Silencer
- Load Center With Lights and GFI Receptacle
- Sub-Base Fuel Tank

CONTROLLER

InteliLite Model IL-NT-MRS19

Ethernet Bridge

Remote Annunciator

MISCELLANEOUS

- Flexible Fuel Lines
- Coolant Drain Kit
- Water Jacket Heater
- Oil Pan Heater
- Generator Strip Heater
- Battery
- Battery Charger
- Pad Type Battery Heater
- Battery Heater Blanket with Thermostat
- Line Circuit Breaker

WARRANTY

- 3 Year Warranty
- 5 Year Warranty

APPROVALS AND LISTINGS


- UL Standard 2200

WEIGHTS AND DIMENSIONS

OVERALL SIZE, L x W x H,: 252 in. x 87.9 in. x 101.8 in.

WEIGHT: 31600 lbs.

Note: Dim and weights reflect standard open unit with no options

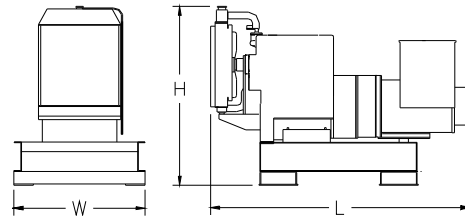

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY:

PENNCAT CORPORATION
404 ELM AVENUE
NORTH WALES, PA 19454
TEL: (610) 272-0505
www.PENNCAT.com