



# Model: TG250



Shown with optional features.

## Ratings Range — 60 Hertz Operation

Standby:	kW	260
	kVA	325
Prime:	kW	170
	kVA	213


## FEATURES

- Single source responsibility for the generator set and accessories.
- Prototype and production tested to insure one step load acceptance per NFPA 110.
- Two year limited warranty on generator sets and accessories. Extended warranties also available.
- Unit conforms to CSA, NEMA, EGSA, ANSI and other standards.
- Heavy duty 4 cycle industrial engine for reliability and fuel efficiency.
- Brushless rotating field generator with class H insulation.
- Heavy duty steel base with integral vibration isolators.
- EPA Certified Engine.

## GEN SET RATINGS

GenSet Model Number	Alternator	Voltage L-N / L-L	Phase	Hertz	Natural Gas 130° Rise Standby Rating		LP Gas 130° Rise Standby Rating	
					kW / kVA	Amps	kW / kVA	Amps
TG250	432CSL6210	277/480	3	60	260/325	391	170/213	256
		139/240	3	60	260/325	782	170/213	511
		127/220	3	60	260/325	853	170/213	558
		240/416	3	60	260/325	451	170/213	295
		120/208	3	60	260/325	902	170/213	590
		120/240	3	60	260/325	782	170/213	511
		220/380	3	60	260/325	494	170/213	323
		120/240	1	60	200/200	833	170/170	708

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor.  
 STANDBY RATINGS: Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271.  
 PRIME POWER RATINGS: Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1, BS5514, AS2789, and DIN 6271. For limited running time and base load ratings consult the factory. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.  
 GENERAL GUIDELINES FOR DERATION: Altitude: Derate 0.5% per 100m (328 ft.) elevation above 1000m (3279 ft.) Temperature: Derate 1.0% per 10°C (18°F) temperature above 40°C (104°F).

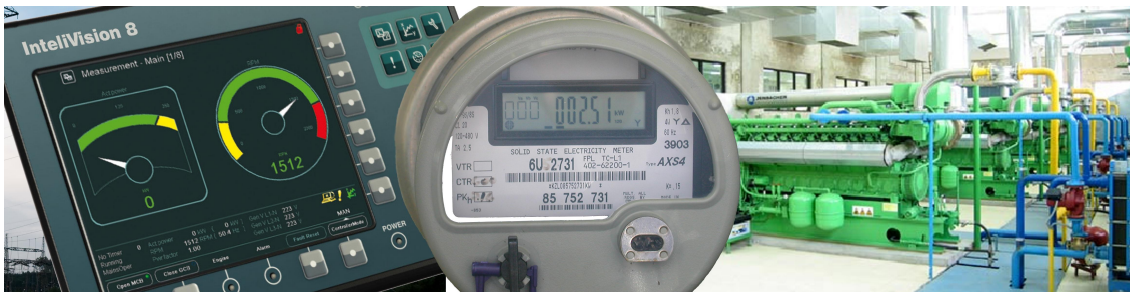

# Application and Engineering Data

<b>Basic Technical Data</b>		<b>Lubrication System</b>	
Manufacturer	Doosan	Type	Full Pressure
Model	D146L	Oil pan capacity	42.3 qt (40 L)
Number of cylinders	8	Oil pan capacity with filter	49.7 qt (47.1 L)
Cylinder arrangement	Vertical in-line	Oil filter: qty and type	2, Cartridge
Cycle	4	<b>Electrical System</b>	
Induction system	Turbocharged, Aftercooled	Ignition system	N/A
Compression ratio	10.5:1	Battery charging alternator:	
Bore	5.04 in (128 mm)	Ground	negative
Stroke	5.59 in (142 mm)	Volts	24
Cubic capacity	892 cu in (14.6 L)	Ampere rating	45
Piston speed	1677 ft/min (511 m/min)	Starter motor rated voltage	24
Main bearings: qty and type	10, Precision Half-Shell	Battery, recommended cold cranking amps (CCA):	
Governor type	Electronic	Qty rating for -18 °C (0 °F)	Two, 1000
Rated rpm	1800	Battery voltage	12
Max power at rated rpm	300 hp (402 kW)	<b>Operation Requirements</b>	
Engine power at Standby rating	N/A	Radiator-cooled cooling air, m <sup>3</sup> /min (scfm) ‡	22500 scfm (638 m <sup>3</sup> /min)
Frequency regulation, no-load to full-load	Isochronous	Combustion air	532 cfm (1064 m <sup>3</sup> /min)
Frequency regulation, steady state	± 0.5%	Heat rejected to ambient air: Engine	3765 Btu/min (66 kW)
Frequency	Fixed	Alternator	1309 Btu/min (23 kW)
Air cleaner type	Dry	<b>Fuel System</b>	
<b>Exhaust System</b>		Fuel Type	LP Gas, Natural Gas or Dual Fuel
Exhaust manifold type	Wet	<b>Fuel Consumption</b>	
Exhaust flow at rated kW	1895 cfm (1131 kg/hr)	<u>Natural Gas</u>	
Exhaust temperature at rated kW	1382 °F (750 °C)	100% Load	2782 cfh (78.8 m <sup>3</sup> /hr)
Maximum allowable back pressure	3.0 in (10.2 kPa)	75% Load	2168 cfh (61.4 m <sup>3</sup> /hr)
Exhaust outlet size at engine hookup	N/A	50% Load	1521 cfh (43.1 m <sup>3</sup> /hr)
<b>Cooling System</b>		25% Load	928 cfh (26.3 m <sup>3</sup> /hr)
Ambient temperature	122 °F (50 °C)	<u>LP Gas</u>	
Engine jacket water capacity	9.5 gal (43.2 L)	100% Load	926 cfh (26.2 m <sup>3</sup> /hr)
Radiator system capacity, including engine	50 gal (227.3 L)	75% Load	789 cfh (22.4 m <sup>3</sup> /hr)
Engine jacket water flow	180 gpm (680 Lpm)	50% Load	532 cfh (15.1 m <sup>3</sup> /hr)
Heat rejected to cooling water at rated	16189 Btu/min (284 kW)	25% Load	335 cfh (9.5 m <sup>3</sup> /hr)
Max restriction of cooling air, intake and discharge side of radiator	0.5 H <sub>2</sub> O (0.125 kPa)		

## Generator Controller Options



- Dashboard Style LCD Panel
- NFPA 110
- SAE J1939 ECU Communications
- Load Share Synch Features
- Metering, Data Trending, Alarms
- Engine Status Indicators
- Fuel Consumption
- CanBus, ModBus
- Ethernet Communications
- Remote Contacts Form C, RS 232/485

- Internet Bridge Module
- Internet Connection & Web Browser
- Remote Access & Control
- IntelliMonitor Network Management
- SNMP, PC SCADA
- Site Overview & Statistic Settling
- Automatic Downloads, Report Writer
- Receive Emails or IM Text
- CAT 5e, RS232/485, RJ 45
- Ethernet or Dial Up Connection
- Fleet Scalability

## Alternator Specifications

<b>Manufacturer</b>	Marathon	<ul style="list-style-type: none"> <li>• NEMA MG1, IEEE, AND ANSI standards compliance for temperature and motor starting.</li> <li>• Sustained short-circuit current of the rated current for up to 10 seconds.</li> <li>• Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.</li> <li>• Self-ventilated and dripproof construction.</li> <li>• Superior voltage waveform from a two-thirds pitch stator and skewed rotor.</li> <li>• Linkboards</li> <li>• Optimized Electrical Design</li> <li>• Enhanced Ventilation</li> <li>• Fully Guarded</li> <li>• Heavy Duty Bearings</li> </ul>
<b>Type</b>	Ext. Voltage Regulated, Brushless	
<b>Gen Frame</b>	MAGNAPLUS	
<b>Insulation</b>	NEMA	
<b>Material</b>	Class H	
<b>Temperature Rise</b>	130 °C, Standby	
<b>Hertz</b>	60	
<b>Phase</b>	3	
<b>RPM</b>	1800	
<b>Exciter</b>	Rotating	
<b># Leads</b>	12 Reconnectable or 4 Single Phase	
<b>PF</b>	0.8	
<b>Ambient</b>	40°C	
<b>Coupling Single Bearing</b>	Flexible	
<b>Amortisseur Windings</b>	Full	
<b>Cooling Air Volume</b>	250 CFM	
<b>Peak Motor Starting</b>	30% Voltage Dip, 750 skVA	
<b>Voltage Regulation no-load and full-load</b>	1 Phase Sensing 1% Optional 3 Phase Sensing 1/2%	

## STANDARD FEATURES

- Heavy Duty Steel Base
- Vibration Isolators
- Oil Drain Valve with Extension
- Battery Rack
- Battery Cables
- High Ambient Unit Mounted Radiator
- Battery Charging Alternator
- Factory Paint
- Factory Test Prior to Shipment
- 2 Year Warranty
- Owners Manual

## AVAILABLE ACCESSORIES

### OPEN UNIT

- Narrow Skid Base
- Radiator Duct Flange
- Ship Loose Flex Exhaust
- Ship Loose Critical Silencer

### ENCLOSED UNIT

- Wide Skid Base
- Standard Enclosure With Internal Silencer
- Sound Attenuated Enclosure With Silencer
- Load Center With Lights and GFI Receptacle

### CONTROLLER

- IntelliLite Model IL-NT-MRS19
- Ethernet Bridge
- Remote Annunciator

## MISCELLANEOUS

- Flexible Fuel Lines
- Coolant Drain Kit
- Water Jacket Heater
- Oil Pan Heater
- Generator Strip Heater
- Battery
- Battery Charger
- Pad Type Battery Heater
- Battery Heater Blanket with Thermostat
- Line Circuit Breaker
- Dual Fuel


## WARRANTY

- 3 Year Warranty
- 5 Year Warranty

## WEIGHTS AND DIMENSIONS

OVERALL SIZE, L x W x H, in.: 120 in x 75 in x 75 in  
WEIGHT: 10380 lbs.

Note: Dim and weights reflect standard open unit with no options

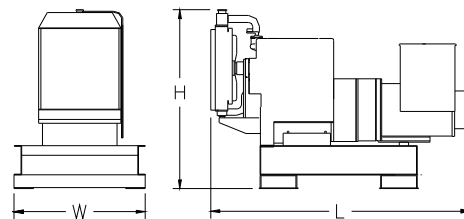

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

## DISTRIBUTED BY:

PENNCAT CORPORATION  
404 ELM AVE  
NORTH WALES, PA 19454  
TEL: (610) 272-0505  
www.PENNCAT.com